Pacesetter[™] 17HD/20HD/20SD/20TS

Floor Machines

Advance

FACT SHEET



Whether stripping, scrubbing, screening, or bonnet cleaning, the Advance Pacesetter[™] line of floor machines has a model to fit your needs and applications. Each of the four Pacesetter models is built with an all cast metal, chrome plated base. The heavy-duty construction and durability of the Pacesetter sets it above the competition.

All Pacesetter models have an ergonomic molded handle that protects the user's hands during operation along walls and around corners. A red safety-lock switch allows the operator to easily control when the machine goes into operation. An easy-to-use compression style lever changes the height adjustment of the handle for all operators. Pad holders are standard on the Pacesetter, and the yellow, super-flex cord offers ease in cord handling and reduced tangling. A clear plastic hospital plug allows the operator to verify the electrical integrity of the connection at each use of the machine.

At 1.5 hp, 175 rpm, the **Pacesetter™ HD** is available in 17 and 20 inch sizes. A triple-planetary gear design lasts longer than other gear drives because they do not develop a wear pattern. A sealed gear box requires no maintenance.

The **Pacesetter™ 20SD** is a super duty 20 inch floor machine. For extreme duty, the 1.75 hp, 175 rpm machine also has the triple-planetary gear design for longer wear.

The **Pacesetter™ 20TS** is a two-speed floor machine with a 1.5 hp and a DC rectified motor. The two-speed machine runs at 180 and 320 rpm.

TYPICAL APPLICATIONS INCLUDE

- Supermarkets
- Schools and Universities
- Hospitals
- Office Buildings
- Hotels / Motels
- Heavy Manufacturing Plants


OPTIONAL ACCESSORIES INCLUDE

- A variety of brushes
- Level-set pad holder
- Splash guard
- Handle-mount solution tank
- Additional weight kit available



Advance Pacesetter[™] 17HD/20HD/20SD/20TS

Floor Machines

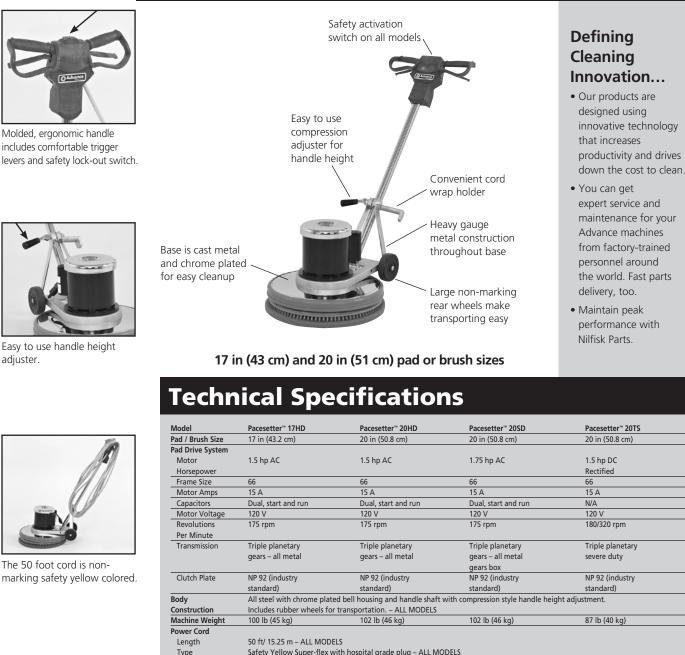

Туре	Safety Yellow Super-flex with hospital grade plug – ALL MODELS				
Operator Handle	Comfortable and solid handle with safety interlock activation preventing accidental start-up – ALL MODELS				
Noise Level	65 dB A	65 dB A	65 dB A	70 dB A	
Approvals	ETL, CSA	ETL, CSA	ETL, CSA	ETL, CSA	
Part Number	01330A	01410A	01460A	01440A	

Specifications are subject to change without notice.





9435 Winnetka Avenue North Brooklyn Park, MN 55445 www.advance-us.com Phone: 800-850-5559 Fax: 800-989-6566
 240 Superior Boulevard

 Mississauga, Ontario, Canada L5T 2L2

 www.nilfisk-advance.ca

 Phone:
 905-564-1149 or 800-668-8400

 Fax:
 905-564-1030 or 800-263-5111

©2015, Nilfisk, Inc., Printed in U.S.A., Form L1826A 8-15

